


PS200 Single DC24V LCD/PVM Power Supply

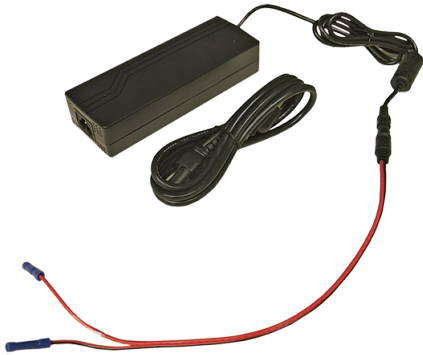

INFO:

- DC24V 5.0 Amp
- Includes Female Pigtail for Long Runs
- Includes Metal Mounting Bracket (Not Shown)
- Recommended for all Clinton DC24V LCDs or PVMs
- UL Listed

SPECIFICATIONS:

AC Input Voltage Range	100 - 240V
Output	24VDC, 5A
AC Inrush Current	100 - 240V, 2.5A
Working Temperature	14°F - 100°F / -10°C - 37.77°C
Safety Standards	UL, CUL, TUV, CE, RoHS
Connection	2.1mm Barrel
Dimensions without cord	6.75" (L) x 2.5" (W) x 1.5" (H) 171.45mm (L) x 63.5mm (W) x 38.1mm (H)
Weight	1.65 lbs / 748.42g

PS12V Single DC12V LCD Monitor Power Supply



INFO:

- DC12V 5.0 Amp
- Recommended for all Clinton DC12V LCDs
- UL Listed

SPECIFICATIONS:

AC Input Voltage Range	100 - 240V
Output	12VDC, 5A
AC Inrush Current	100 - 240V, 2A
Working Temperature	14°F - 100°F / -10°C - 37.77°C
Safety Standards	UL, CUL, TUV, CE, RoHS
Connection	2.1mm Barrel
Dimensions without cord	1.33" (D) x 2.29" (W) x 4.28" (H) 33.782mm (L) x 58.166mm (W) x 108.712mm (H)
Weight	.8 lbs / 362.873g