

EX-SDI




**This camera's default SDI video output is set to: EX-SDI 4MP*

4MP EX-SDI Compatibility

The EX-SDI 4 Megapixel camera image will only display on a **4MP EX-SDI DVR** or other EX-SDI 4MP device.

Use the **BLACK BNC connector for EX-SDI 4MP** Output (Green connector is analog).

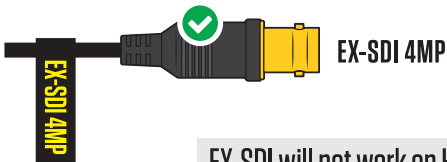

ANALOG



See reverse side of sheet for Analog info

EX-SDI will not work on HD Analog only DVRs & Devices

4MP Distance

The camera is defaulted to **EX-SDI 4MP**, which is capable of transmitting video up to **800'** over RG59 coax cable.


For greater distance change the SDI Output to a lower resolution (2MP).

SDI OUTPUT	DISTANCE	RESOLUTION
EX-SDI 4MP	800'	QHD - 1440p
EX-SDI 2.0	1,400'	FHD - 1080p
EX-SDI 1.0	800'	FHD - 1080p
HD-SDI	275'	FHD - 1080p

4MP SDI Output

To change the 4MP Output: Enter the OSD Menu of the camera, then access the SYSTEM Menu. Change the frame rate from **1440p** to either **1080p** or **720p**, then select the desired SDI Output (**EX-SDI 2.0**, **EX-SDI 1.0**, or **HD-SDI**).

Step 1:
Change Frame Rate

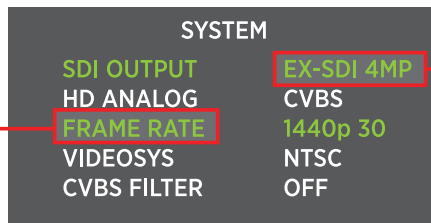

Step 2:
Change Output

If you need further help call Clinton Electronics Technical Support at 800-549-6393.

**Information in this document is subject to change without notice*

v.06.04.19